


- 
- 1 The highest quality slats from the best European supplier – Hoesch. They are equipped with a patented mechanism protecting against crushing fingers.
 - 2 Two durable tracks made of 1,5 mm thick steel.
 - 3 A Somfy motor enables its comfortable use. As the only manufacturer we provide two remote controls enclosed in all standard versions. Additionally, they can be upgraded to motors with a geolocation door opening option.
 - 4 Simplified installation – fewer parts and preassembled elements. One person is enough to install a garage door.
 - 5 The philosophy of two spanners – there are only two spanners needed to install the whole garage door (10 and 13).
 - 6 A possibility to incorporate glass panels and any Inox design at a customer's special request.
 - 7 An engine is equipped with an obstacle detection option and a four-step adjustment of the compression strength. After detecting any obstacle for instance a car entering the garage, the garage door will stop thereby causing no damage.
 - 8 Extremely silent operation that is guaranteed by the high quality silent rubber rollers.
 - 9 A user's safety is upgraded by the so-called spring-in-spring mechanism that we applied.
 - 10 Garage doors in the standard versions are available in three colours: white, anthracite and silver. You may also choose between smooth and milled panels.
 - 11 At a customer's special request we varnish and veneer the garage doors to match other doors and windows. This applies to smooth panels only.
 - 12 Hinges with the upgraded durability.
 - 13 Structure stability as well as precise and easy installation is possible due to a rear beam that we offer in our standard versions as one of few manufacturers.
 - 14 Durability of our springs go up to 25 000 cycles that ensures a garage door longevity of 10 years.
 - 15 In our offer you will find two solutions with torsion or tension springs.
 - 16 Tightness of a garage door is guaranteed by thermal seals in frontal beams as well as a bottom seal with three support points.

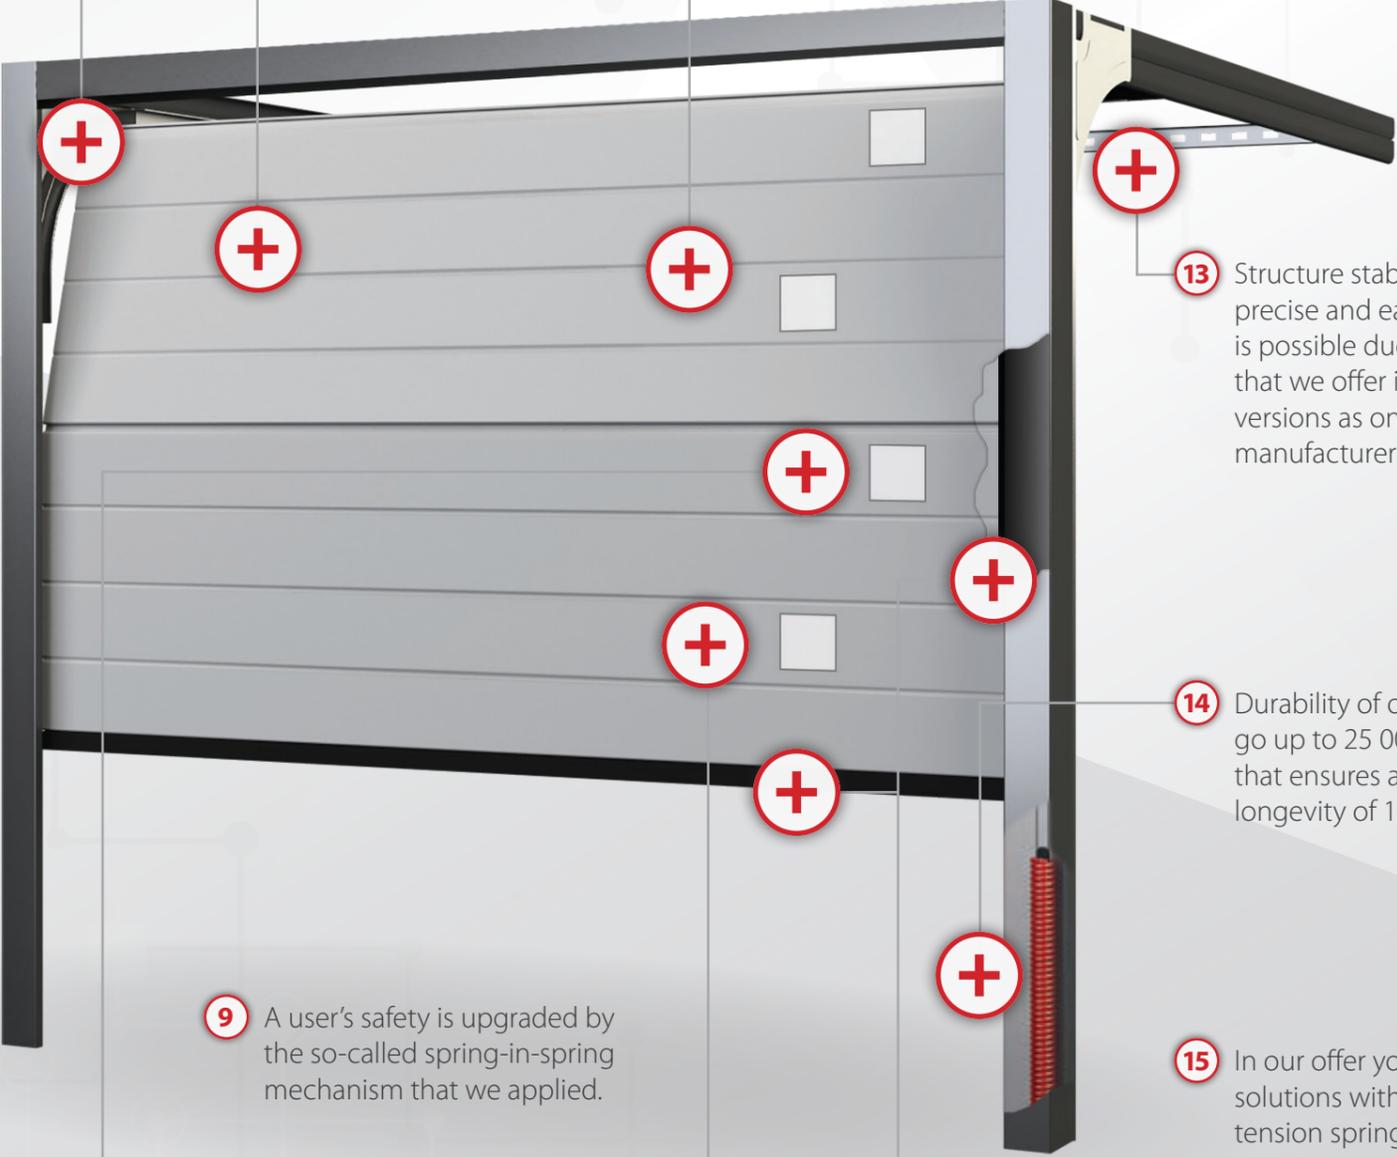